


W15P SIP Wall Speaker 15/30 W

The W15P SIP wall speaker is suited for both indoor and outdoor Paging or PA and can work standalone or with Paging server.

W15P being SIP based easily integrates into an existing IP Phone system to deliver a quick and cost effective solution eliminating the need for separate networks and hardware. Users can make announcements from IP phones without the need for Mics., thanks to PoE you will not need to spend on electrical cables or outlets either.

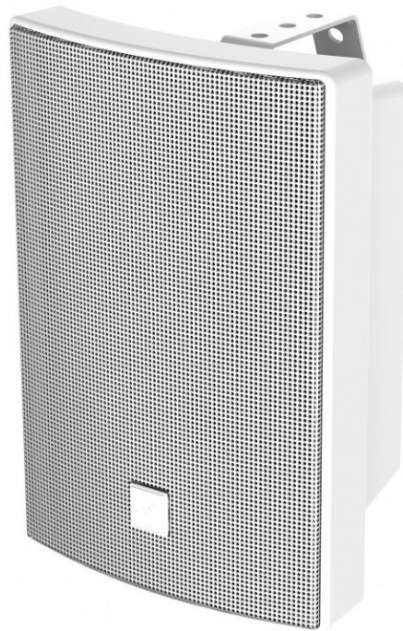

- SIP Enabled with G722 HD sound
- RTP Broadcast & Multicast
- Integrates with IP PBX
- Programming by web login
- P2P Paging from IP Phone
- IP55 Protection Rating
- Built in D class stereo amp
- PoE for easy installation

Specifications	
Output	15W with PoE, 30W option available.
Audio Decoding	G711A, G711U, PCM, MP3.
Network Protocols	TCP/IP, UDP, ARP, ICMP, IGMP, SIP.
Processing	High speed dual core industrial grade processor .
Operating temperature	-20°C~50°C, operating humidity 10%~90%.
Dimensions & Weight	296 x 196 x 157 mm, 2.4 Kg.
Network and Power	RJ45 socket with PoE IEEE802.3af compliant , DC24V power connector.